

3/8" Allowance for Casing

**Pant Pattern for 18" Doll
Cut 2**

Copyright by Jodie's Sewing Studio


1/4" Seam Allowances are Included

This box
should
measure 1"

Grain of Fabric Line

Center Front

Center Back

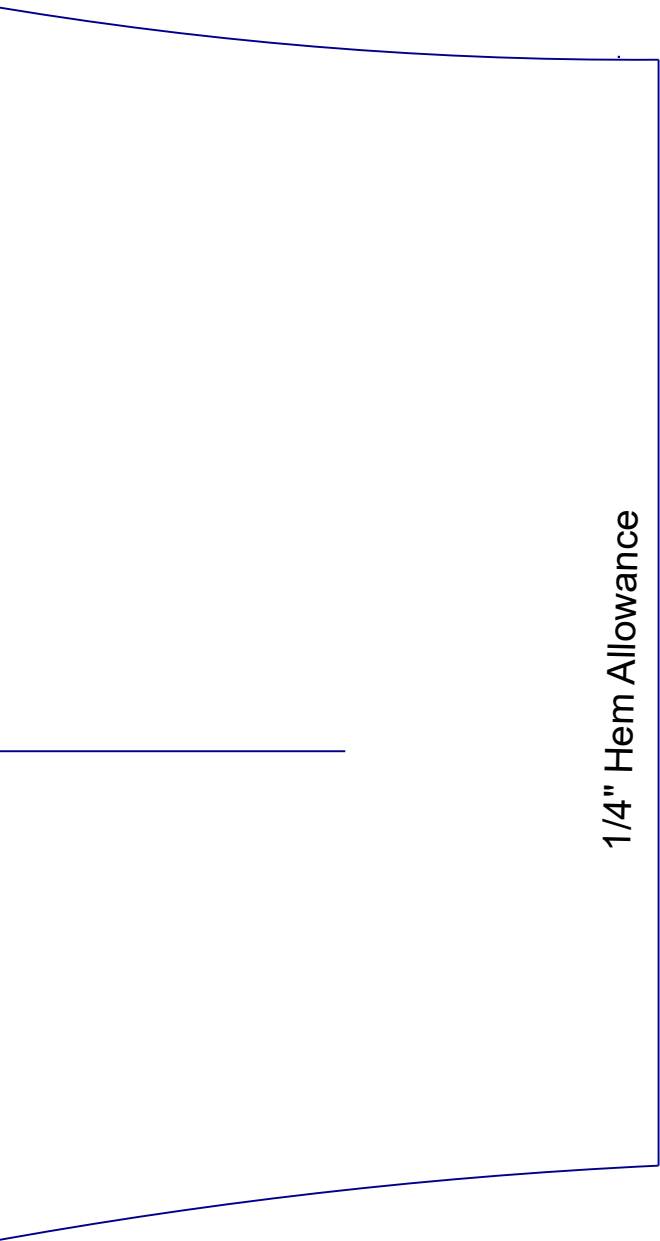

1/4" Hem Allowance

Instructions:

1. Cut 2 pieces with fabric right sides together.
2. Stitch center front seam using 1/4" seam allowance. Zig Zag or use pinking shears to "finish" the seam.
3. Press down the top edge 3/8". Stretch a 6" piece of 1/4" wide elastic across the top inside the folded edge. It helps to stay stitch the elastic ends at each of the center back edges. Then, pin the elastic to hold it in place. Zig Zag through all layers.
4. Press up each leg hem 1/4" and stitch.
5. Center Back Seam: Fold the partially sewn pant right sides together and stitch the center back seam. Back stitch at the beginning and end of that seam. Finish the seam with a Zig Zag stitch or pinking shears.
6. Inside Leg Seam: Keep the pants right sides together (inside-out). Pin and stitch starting from one hemmed leg, stitching up to the center crotch seam and down to the second hemmed leg. Finish the seam with a Zig Zag stitch or pinking shears. You are Finished!

Additional Tips:

1. I like to use clover clips instead of pins when making doll cloths.
2. When using pinking shears, trim just the edge of the seam. Do not cut down to the actual seam.